IKO®

excel HOMES

1. **LAMINATE ADHESIVE.** Five strips of our tough, construction-grade adhesive are used to laminate the shim to the tooth.

2. **BUILT-IN ALGAE RESISTANCE.** Special colorfast granules embedded in the shingles' surface helps inhibit the growth of blue-green algae that can cause unattractive black stains, streaks and discoloration.

3. **CORE STRENGTH.** Our resilient fiberglass mat is coated top and bottom with weathering asphalt, then surfaced with colored granules. It's heavy-duty for exceptional durability and structural integrity.

4. **EXCEPTIONAL BONDING.** IKO'S Fastlock sealant on the shingles' bottom edge gets extra -tacky when activated by the sun's heat. This creates a strong bong to help ensure maximum protection against wind uplift, blow-off and water penetration.

Limited Warranty[1]	Limited Lifetime
Iron Clad Protection[1]	10 Years
Limited Wind Warranty[1]	110 mph (177km/h)
Limited High-Wind Warranty Upgrade[1] [2]	130 mph (210 km/h)
Blue-Green Algae Resistant [1]	Yes

Production Specifications[3]

Length	40 7/8 in (1038mm)
Width	13 3/4 in (349 mm)
Exposure	5 7/8 in (149 mm)
Coverage Per Bundles	33 1/3 ft ^{2} (3.1m^2)
(3 bundles = 1 full square = 100 sq ft coverage)	

STANDARDS[4]

ASTMD3462, ASTMD3018 , ASTMD3161—Class F,

ASTMD7158—Class H, ASTME1085/UL790—Class A

[1]See Limited Warranty at IKO.com for complete terms, conditions, restriction and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. [2]High-wind application is required. [3] All values show are approximate. [4]Products are developed with reference to these standards.

Cambridge Collection

AGED REDWOOD

BEACHWOOD

DRIFTWOOD

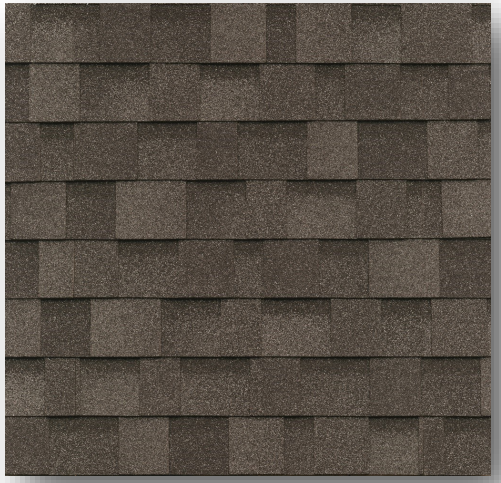

CHARCOAL GREY

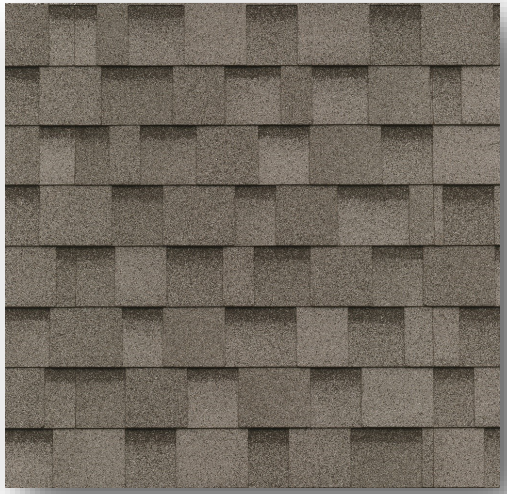

DUAL GREY

EARTHTONE CEDAR

Cambridge Collection

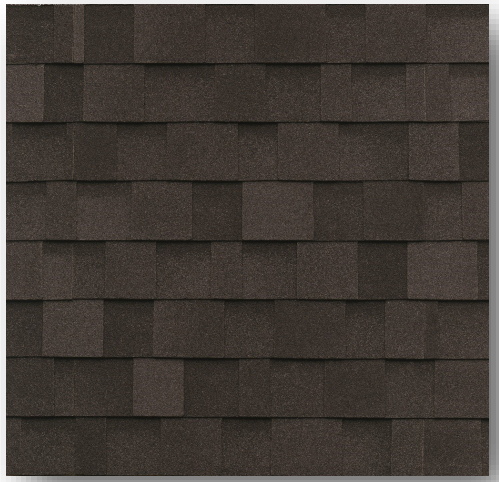

DUAL BLACK

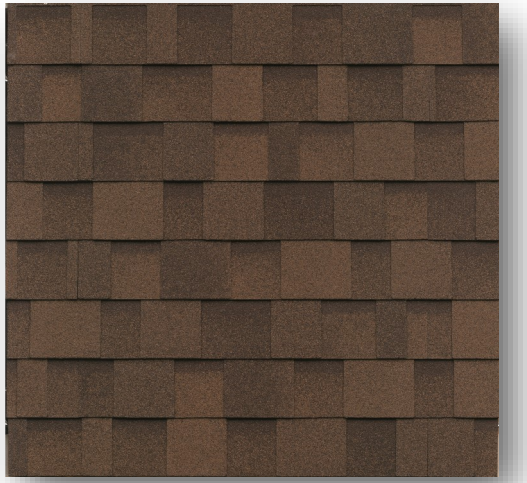

DUAL BROWN

WEATHERED WOOD

HAVARD SLATE

DOVE WHITE